

ATLAS Software tutorial
7th – 10th December 2009

Trigger Data for Analysis

Jörg Stelzer DESY


Ricardo Gonalo RHUL

- This talk is an introduction to the trigger data and user tools
- Just to prepare you for the hands-on exercises tomorrow
- Much more material than can be covered in 15' (hopefully useful as a reference)
- Before moving to the tools, let's have a look at how the trigger works...

The Trigger

EM ROI

An example

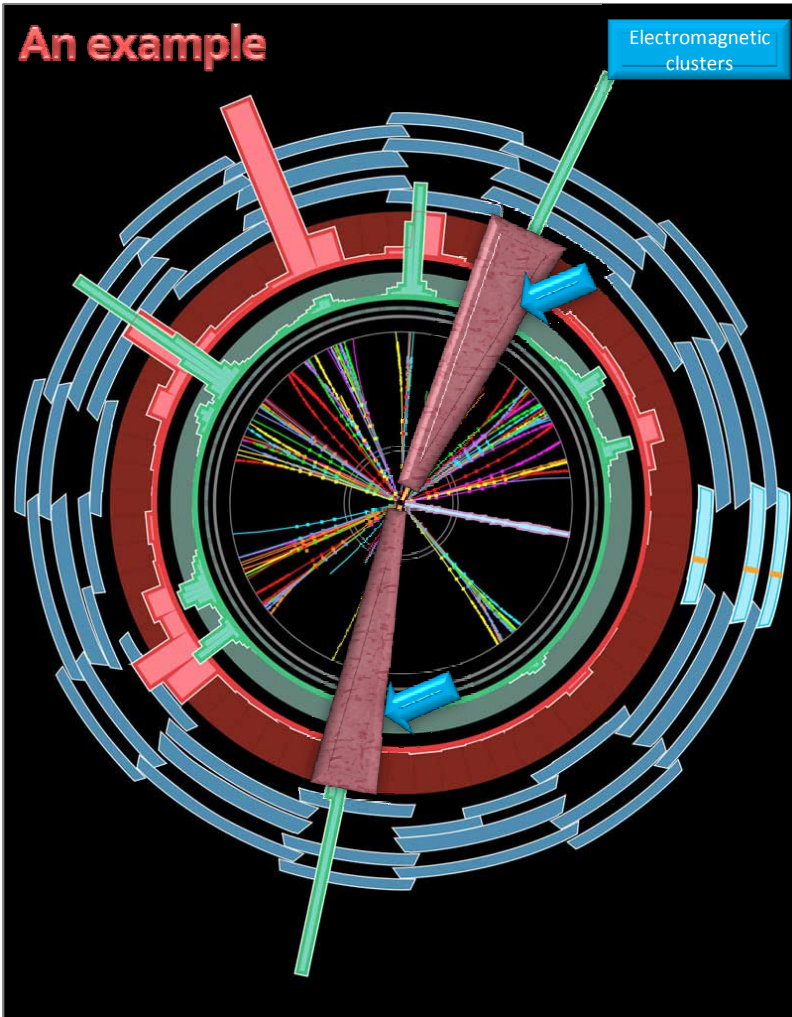

Level1:

Region of Interest is found and position in EM calorimeter is passed to Level 2

Level 2 seeded by Level 1

- Fast reconstruction algorithms
- Reconstruction within ROI

Ev.Filter seeded by Level 2

- Offline reconstruction algorithms
- Refined alignment and calibration

L2 calorim.

cluster?

L2 tracking

track?

match?

E.F.calorim.

E.F.tracking

track?

e/ γ reconst.

e/ γ OK?

The Trigger Execution

FEX FEX algo's are executed to create
Feature features on which selection in HYPO
HYPO algo's is based

Chain:


- Started, if seed has fired and chain is not **PRESCALED**
- Stopped **AT STEP**, if a HYPO is not passed
- Last HYPO passed → **CHAIN PASSED**

Event:


- Passed, if at least one EF chain is passed
- Put into all streams that are associated with the passed EF chains

Trigger objects associated with triggers through Navigation **TriggerElements**

- Trigger information in **ESD** **AOD** **DPD** **TAG**
 - TRIGGER DECISION** + Configuration +
Navigation + **Feature**

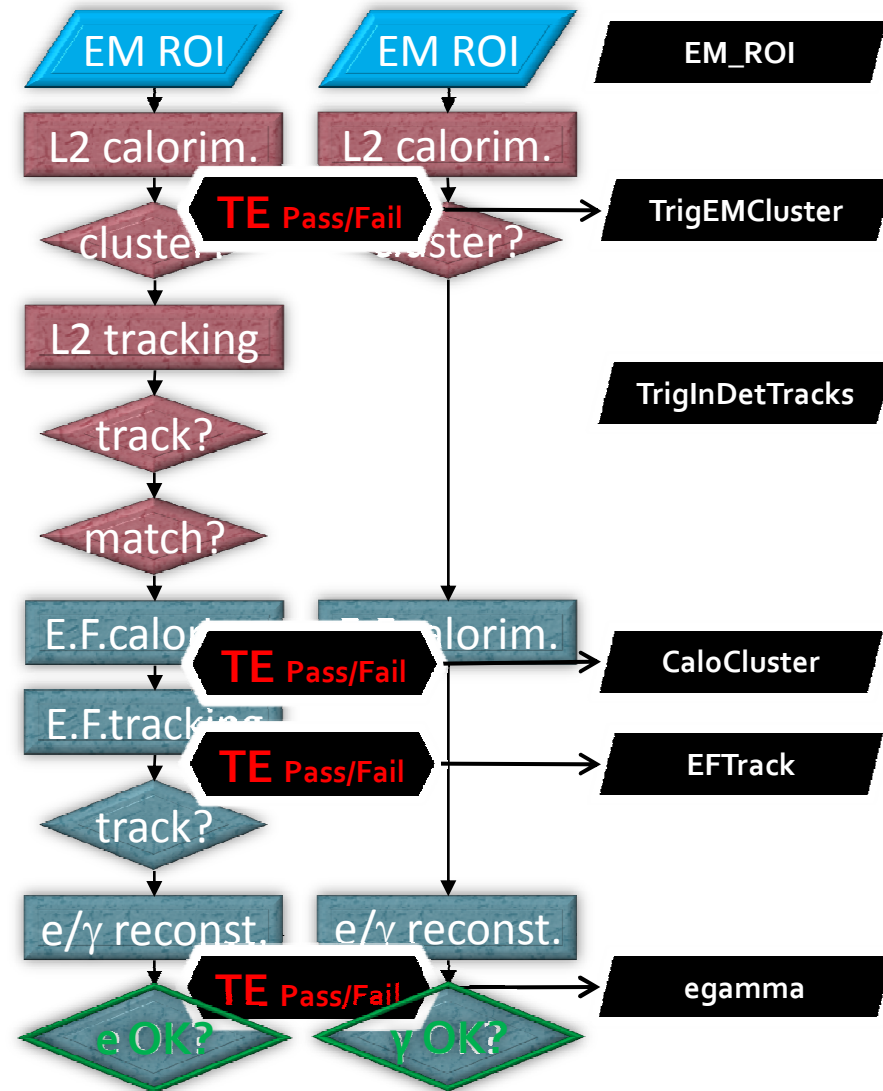


Trigger Configuration + Data

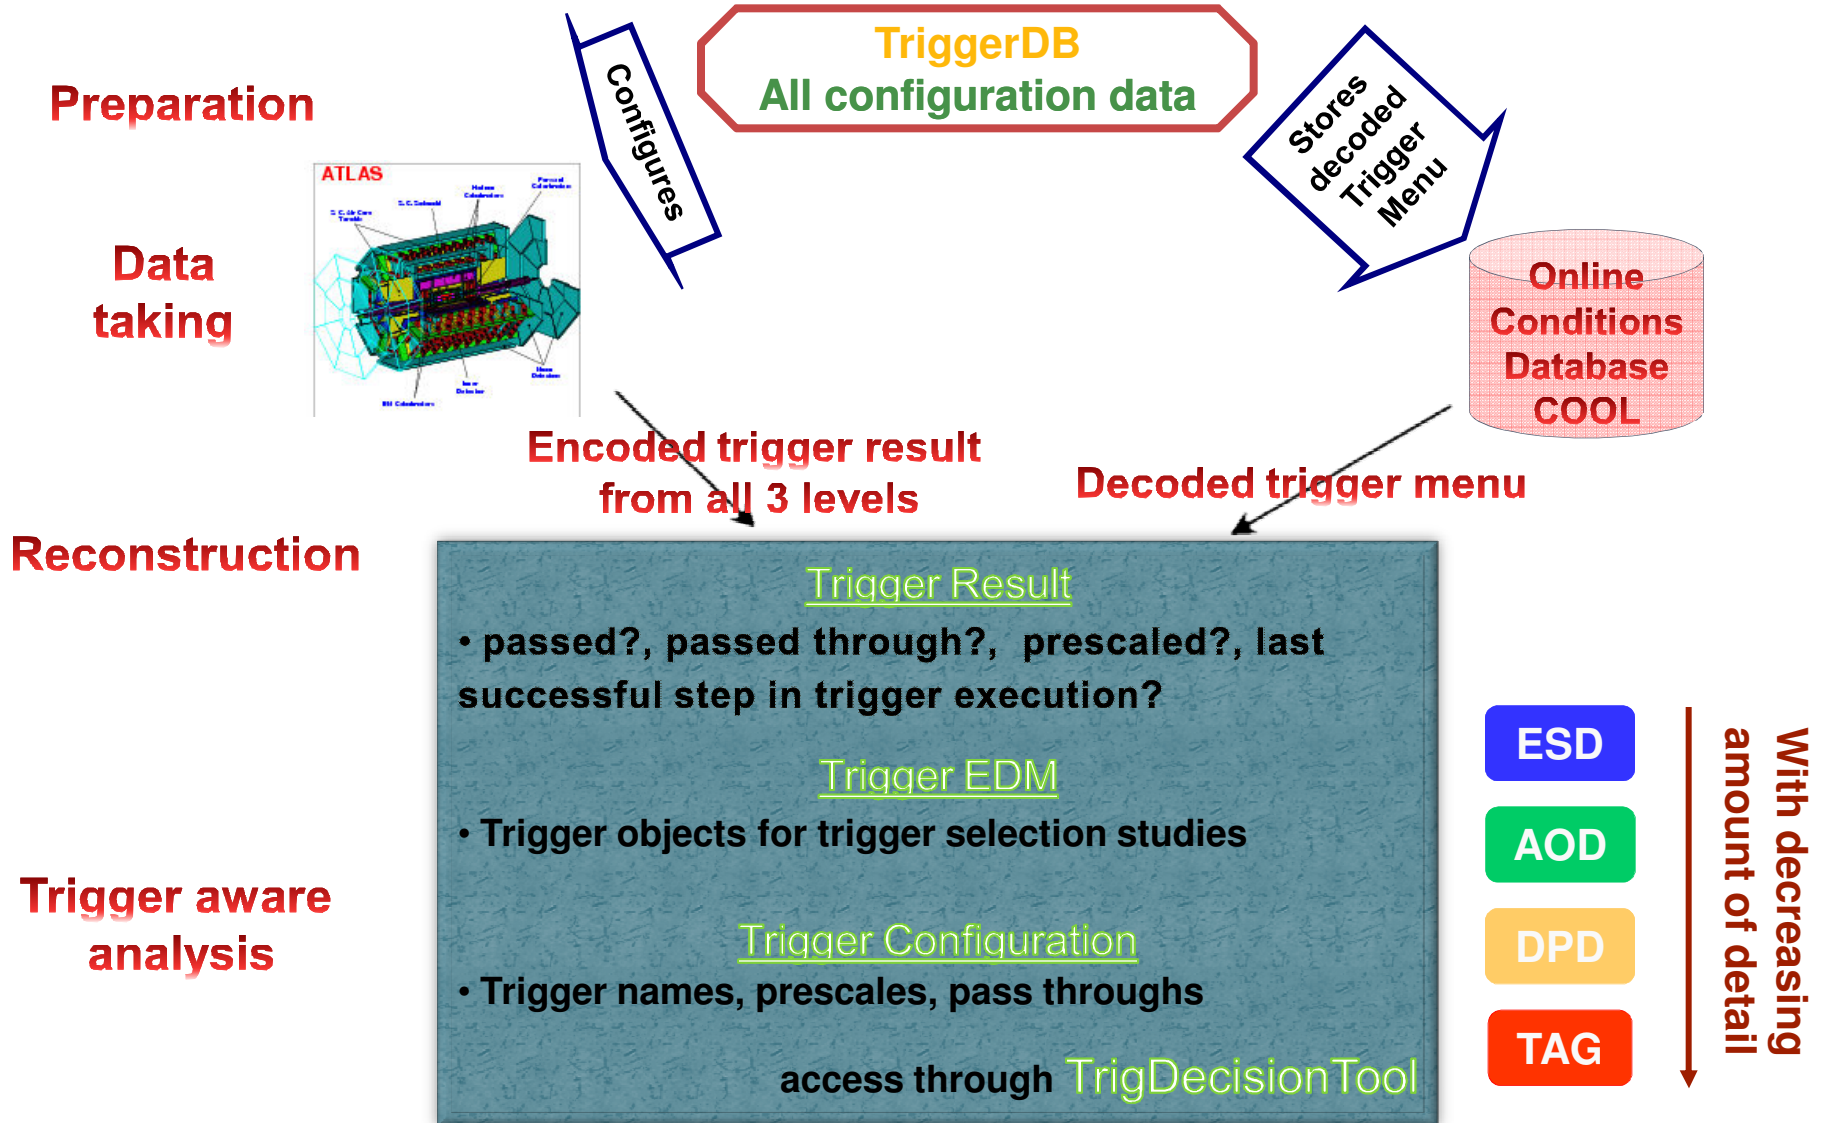

- Analysis based on single trigger chain or an 'OR' of a few chains (a 'ChainGroup')
- Chain definition – algorithms, cuts, multiplicities – do not change during a run, but can change between runs
 - Important for analysis on DPD, where multiple runs are merged, check the ChainGroup content between each run
- Prescales at LVL1 and at HLT can change between luminosity blocks
 - A negative prescale means that this trigger is off. This is important for calculating the integrated luminosity. Check each luminosity block.

Bringing it Together – TrigDecisionTool

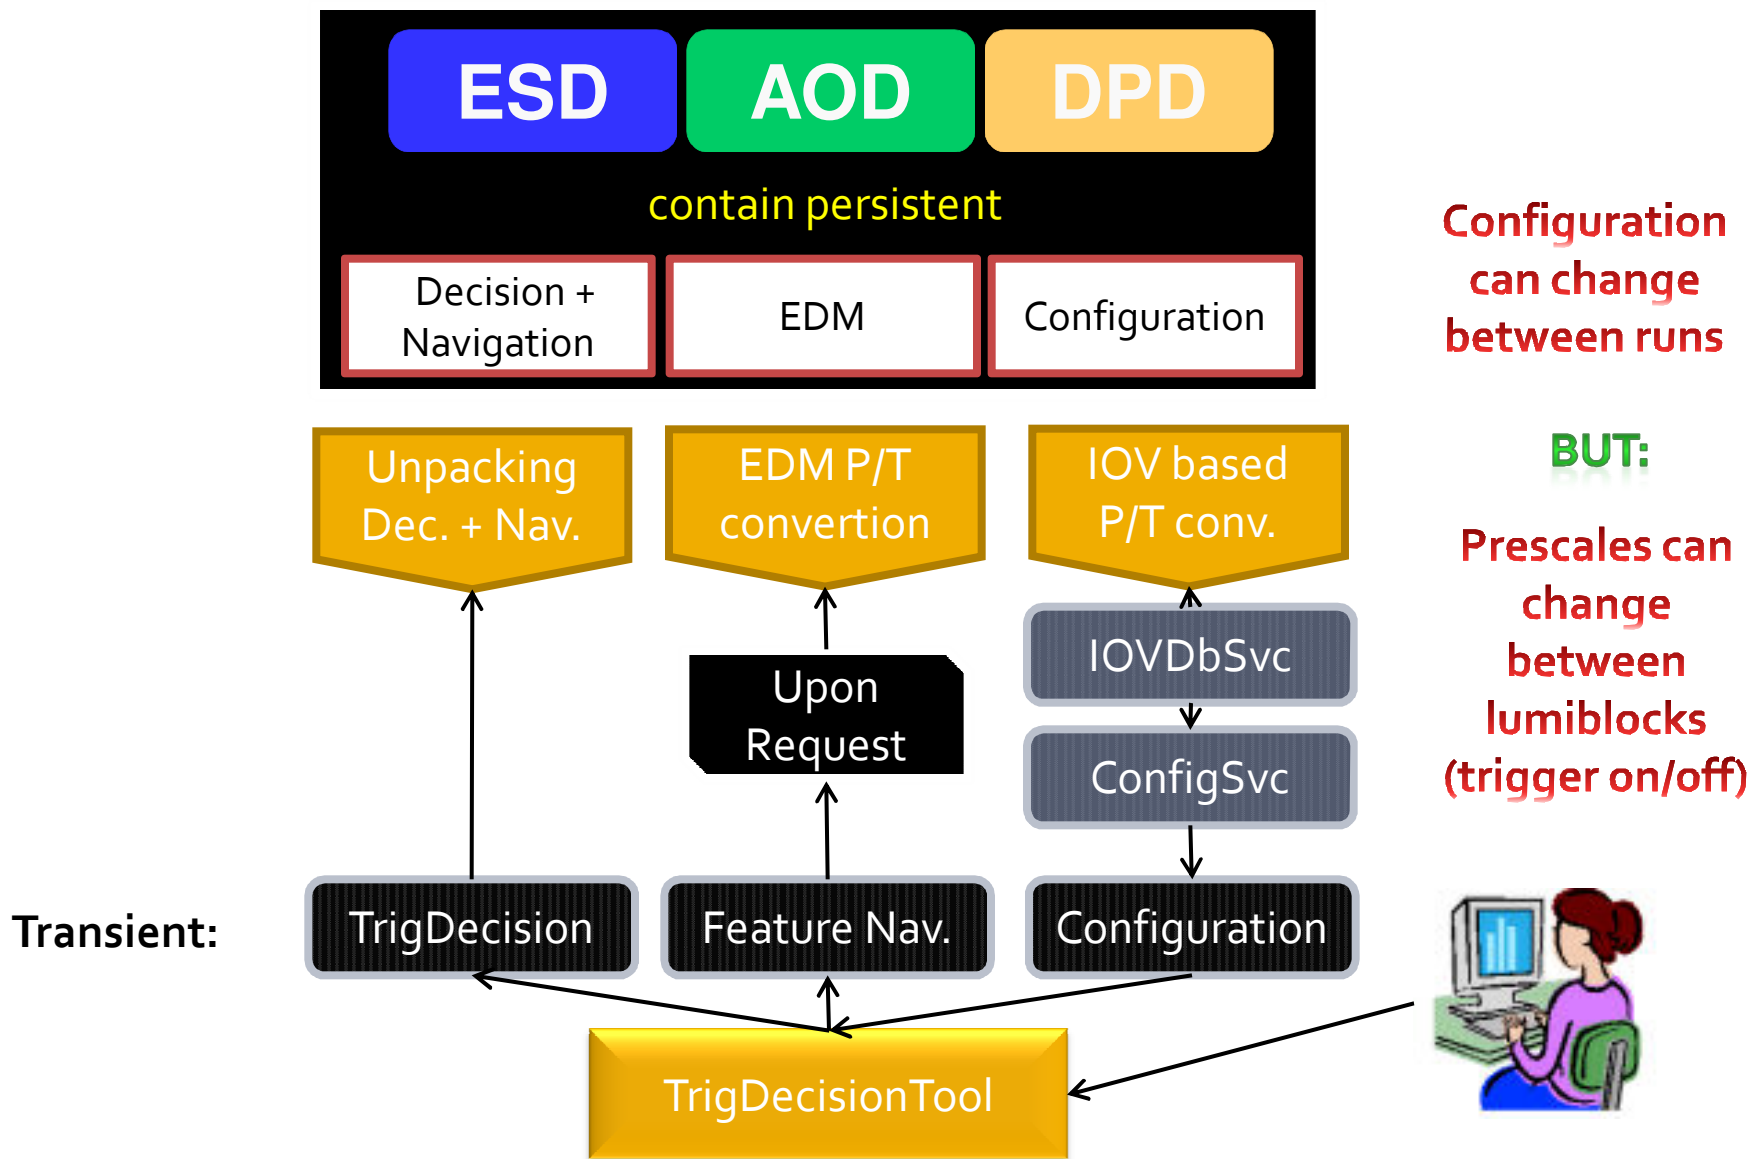

Tool Usage

1. Alg.h: define ToolHandle to a TrigDecisionTool

```
private:  
    ToolHandle<Trig::TrigDecisionTool> tdt;
```

2. Alg.cxx – Alg::Alg(): declare ToolHandle as public tool

```
MyAlgo::MyAlgo(const std::string &name, ...)  
    tdt("Trig::TrigDecisionTool/TrigDecisionTool")  
    {...}
```

3. Alg.cxx – Alg::initialize(): retrieve tool

- Has to be in initialize()!

```
StatusCode sc = tdt.retrieve();
```

4. Alg.cxx – Alg::execute(): use tool

```
if (tdt->isPassed ("L2_e15i")) {  
    log << MSG::INFO << "I'm happy!" << endreq;  
}
```

TWIKI: <https://twiki.cern.ch/twiki/bin/view/Atlas/TrigDecisionTool15>

Doxygen: <http://atlas-computing.web.cern.ch/.../TrigDecisionTool/html/>

Working with ChainGroups

1. Alg.h: define ChainGroup pointer

```
const Trig::ChainGroup* mMyTrigger;
```

2. Alg.cxx – Alg::initialize(): declare ChainGroup

- Note: the ChainGroup automatically updates with each run (chain content) and lumiblock (prescales)
- Use regular expressions, e.g. "EF_e.*"

```
mMyTrigger =  
    tdt.createChainGroup("EF_e10_loose");
```

3. Alg.cxx – Alg::execute():

- Access to trigger configuration
- Access to trigger decision
- Access to trigger objects

```
bool useLB = ! mMyTrigger->getListOfTriggers().empty();
```

```
bool myEvent = mMyTrigger.isPassed();
```

```
const Trig::FeatureContainer fc = mMyTrigger.features();  
const std::vector< Trig::Feature< TrigTau > > taus =  
    fc.get();
```

Anonymous ChainGroups:

- Note that one can work without steps 1 and 2. In Alg::execute() define the triggers on the fly:
- Equally fast (TDT keeps ChainGroups)

```
string tr ("EF_e10_loose");  
bool useLB = ! tdt->getListOfTriggers().empty(tr);  
bool myEvent = tdt->isPassed(tr);  
const Trig::FeatureContainer fc = tdt.features(tr);
```

- L1 Items: name, prescale
 - For more detailed studies: version, CTP-Id, bunch group, thresholds and multiplicities
- HLT Chains: name, level, prescale, streams
 - For more detailed studies: version, counter, trigger elements and multiplicities
- Trigger Release, configuration keys (useful for lookup in the TriggerDB)
 - No access with the TDT, but `checkConfigTrigger.py`

Configuration Access with the TDT

<code>std::vector< std::string ></code>	<code>getListOfTriggers (const Trig::ChainGroup *chaingroup) const</code> <i>List of trigger names of the ChainGroup chaingroup</i>
<code>std::vector< std::string ></code>	<code>getListOfStreams (const Trig::ChainGroup *chaingroup) const</code> <i>List of stream names of the ChainGroup chaingroup</i>
<code>std::vector< std::vector< std::string > ></code>	<code>getListOfTriggerElements (const Trig::ChainGroup *chaingroup) const</code> <i>List of lists of TE names in ChainGroup chaingroup. Inner vectors are for a single trigger step, the length of those is the trigger multiplicity.</i>
<code>float</code>	<code>getPrescale (const Trig::ChainGroup *chaingroup, unsigned int condition=TrigDefs::Physics) const</code> <i>Prescale of the ChainGroup chaingroup.</i>

- All methods come with two flavors, argument:
 const [Trig::ChainGroup](#) *chaingroup
 const std::string &triggerNames=".*"
 Here the ChainGroup is created on the fly from the pattern 'triggerNames' (regexp -
 ".*" means 'all')
- All functions are forwarded from ChainGroup, tdt->fnc(chgr,...) is equivalent to
 chGr->fnc(...)
- Prescales: For single triggers the prescale combined for all levels is returned. If a multi-trigger ChainGroup contains an unprescaled trigger, the return value is 1. It is 0 otherwise.

- Lvl1 decision after dead-time veto
- HLT decision, information for pass-through'ed and for resurrected triggers
- Bunch groups that fired
- For more detailed studies:
 - Lvl1 decision before prescale, before veto
 - Error codes for HLT-algorithms
 - Last step of chain execution

Decision Access with the TDT

bool [isPassed](#) (const [Trig::ChainGroup](#) *chaingroup, unsigned int condition=[TrigDefs::Physics](#)) const

true if given group of chains passed

char [getBGCode](#) () const

Get the bunch group code byte. BG X fired (X=0..7): getBGCode() & (0x1<<X)

All trigger decisions through “isPassed()”, behavior depends on “condition” argument:

- **TrigDefs::Physics:** [default]
 - Pseudonym for **requireDecision** | **enforceLogicalFlow**, which means that both conditions are applied. Default for isPassed() and for getPrescale().
- **TrigDefs::enforceLogicalFlow, TrigDefs::fullChain:**
 - combination of all three trigger levels.
- **TrigDefs::requireDecision:**
 - A decision must have been made, pass due to *pass-through* or *resurrection* is not enough.
- **TrigDefs::passedThrough:**
 - Event was passed through. A trigger chain can have a pass-through factor in order to record events independent of the decision. This is useful for understanding the trigger behavior. Restrict the isPassed() to those events, requireDecision must be off.
- **TrigDefs::allowResurrectedDecision:**
 - If a trigger is prescaled on a given event, that trigger chain is not executed. If that event is accepted it is often important to know also the trigger decision and features of the prescaled trigger (orthogonal triggers for efficiency determination.) For a fraction of these cases we execute the trigger and save its decision. This is accessed with allowResurrectedDecision (requireDecision must be off.)

- Access to features through the “TriggerNavigation”
- Features are created by FEX algorithms, they appear in StoreGate. A FEX also creates a “TriggerElement” (TE)
 - A TE is used as handle to the feature
 - A TE has a pass/fail state set by the corresponding HYPO
- The navigation gives you all the features that were created in a chain
 - Or just those that were successful (features in ROI's which passed all cuts) – that is the default!
 - Can also give you combinations of features (for multi-object triggers)
 - Ancestor function to navigate, e.g. from electron to track and cluster

Feature Access with the TDT

`const FeatureContainer features (const ChainGroup *group, unsigned int condition=TrigDefs::Physics) const`

returns all features related to given chain group

`template<class T> const Feature<T> ancestor (const HLT::TriggerElement *te, std::string label="") const`

gives back feature matching (by seeding relation) te - is trigger element to start with, note that thanks to conversion operators [Feature](#) object can be given here as well

- condition == [TrigDefs::Physics](#): contains features where ROI passed the last HYPO
- condition != [TrigDefs::Physics](#): all features created in trigger

[FeatureContainer](#):

`template<class T> const std::vector<Trig::Feature<T>> get (const std::string &label="", unsigned int condition=TrigDefs::Physics, const std::string &teName="") const`

returns flattened vector of Features of given type This method is in fact sullied by 3 arguments.

`const std::vector<Trig::Combination> & getCombinations () const`

returns reference to combinations collected through append

[Combination](#)

`template<class T> const std::vector<Trig::Feature<T>> get (const std::string &label="", unsigned int condition=TrigDefs::Physics, const std::string &teName="") const`

Method used to get objects.

Working with Features

- Access always a two or three step process
 1. FeatureContainer *fc* from the TDT
 2. List of Features<T> from *fc*
or
 2. List of Combinations from *fc* and 3. list of Features<T> from each Combination
- Feature<T> has access to
 - Its constant object: `const T*`
 - The TriggerElement to which the object has been attached
 - This can be used with `TDT::ancestor(TriggerElement*)` method to find predecessors
 - Label (key in SG)

Feature<T>:

`operator const T *` () const

implicit conversion to object pointer (explicit conversion [cptr](#) () for python)

`operator const HLT::TriggerElement *` () const

implicit conversion to TriggerElement (explicit conversion [te](#) () for python)

`operator const std::string` () const

explicit conversion to feature label (explicit conversion [label](#) () for python)

Athena Example for using Features

FeatureContainer for
'EF_tau16i_loose_2j23'

Access the feature
You need to know the
type of the Feature:
'JetCollection' in EF

Access the object
(implicit conversion)

Access information of
object

Find corresponding L2
jet using
TDT::ancestor<T>

```
FeatureContainer f = tdt->features("EF_tau16i_loose_2j23"); // creating the feature container
std::vector< Feature<JetCollection> > jetColls = f.get<JetCollection>();
mLog << MSG::INFO << "Number of JetCollections: " << jetColls.size() << endreq;
if(jetColls.size()>0) {
    const Feature<JetCollection>& jcf = jetColls[0]; // get the first Feature
    mLog << MSG::INFO << "Label: " << jcf.label() << endreq;
    const JetCollection* jc = jcf; // implicit Feature -> object conversion
    mLog << MSG::INFO << "Number of Jets: " << jc->size() << endreq;
    JetCollection::const_iterator jlt = jc->begin();
    for (; jlt != jc->end(); ++jlt ) {
        Jet* jet = *jlt;
        mLog << MSG::INFO << "Jet e : " << jet->e() << endreq;
    }
    // find the corresponding jets in Lvl2 through the inheritance tree (navigation does that all)
    Feature<TrigT2Jet> l2jetF = tdt->ancestor<TrigT2Jet>(jcf);
    mLog << MSG::INFO << "Found " << (l2jetF.empty()?"no ":"") << "corresponding L2 Jet." << endreq;
    if ( !l2jetF.empty() ) {
        const TrigT2Jet* t2jet = l2jetF.cptr(); // explicit Feature -> object conversion
        mLog << MSG::INFO << " e : " << t2jet->e() << endreq;
    }
}
```

Output:

```
Number of JetCollections: 1
TE Label: TrigJetRec
Number of Jets: 1
Jet e : 82827.9
Found corresponding L2 Jet.
e : 83197.4
```

- 14.2.22+: ARA with trigger data works, but limited to configuration and trigger object access. TrigDecisionTool and Navigation don't work with ARA here.
- 15.3.0+: new TrigDecisionTool. Everything works with ARA and **like in Athena**.
 - Running over multiple files with different configurations works seamlessly
- Athena and ARA work both in C++ and in python
 - Note templated functions syntax:
 - C++: `fc.get<TrigRoiDescriptor>("initialRoI")`
 - Python: `fc.get('TrigRoiDescriptor')('initialRoI')`
 - Implicit conversions don't work in python
 - Use `Feature::cptr()` and `Feature::te()`
 - Examples for all 4 cases are in [Trigger/TrigAnalysis/TrigAnalysisExamples](#)

- **FEXs** create **trigger objects**, which they attach to a **TriggerElement**, sometimes with a **Label**.
 - Two examples for the current 10³¹ menu and 15.4.0:
 - **InDet::Pixel_TrgClusterization/PixelClustering_Tau_EFID** attaches **PixelClusterContainer** objects to **EFtau16i_loosetr**.
 - **TrigJetRec/TrigJetRec_Cone** attaches **JetCollection** objects to **EF_j23**, this time with the extra label "**TrigJetRec**"
- Q: Which FEX creates what type of object and what label ?
 - A: One needs to know the trigger software, and read the *literature* or look at the code. Use LXR and the algorithm classname to find out what is produced.
 - This can be of help:
 - Looking at the **Trigger EDM TWIKI** (type, label, slice, LXR):
<https://twiki.cern.ch/twiki/bin/view/Atlas/TriggerEDM>
 - Checking the **AOD content** (which labels exist for which type in the file):
 - `checkFile.py AOD.pool.root`
 - I recommend looking at [TrigEventARA/selection.xml](#) for the type used in the navigation (the one you need)

- Feature access methods in the TrigDecisionTool have an optional argument "label". These correspond to the StoreGate keys (minus "HLT_").

```
> checkFile.py AOD.pool.root |grep TrigRoiDescriptor
```

52.334 kb	5.552 kb	0.022 kb	0.199	250	(B) TrigRoiDescriptorCollection_tlp1_HLT_TrigCaloRinger
56.061 kb	7.773 kb	0.031 kb	0.186	250	(B) TrigRoiDescriptorCollection_tlp1_HLT_secondaryRoI_EF
63.160 kb	10.673 kb	0.043 kb	0.164	250	(B) TrigRoiDescriptorCollection_tlp1_HLT_forMS
63.160 kb	10.679 kb	0.043 kb	0.164	250	(B) TrigRoiDescriptorCollection_tlp1_HLT_forID
66.552 kb	11.474 kb	0.046 kb	0.156	250	(B) TrigRoiDescriptorCollection_tlp1_HLT_secondaryRoI_L2
96.685 kb	25.609 kb	0.102 kb	0.108	250	(B) TrigRoiDescriptorCollection_tlp1_HLT_TrigT2CaloEgamma
96.325 kb	27.150 kb	0.109 kb	0.108	250	(B) TrigRoiDescriptorCollection_tlp1_HLT_TrigT2CaloTau
110.456 kb	31.728 kb	0.127 kb	0.095	250	(B) TrigRoiDescriptorCollection_tlp1_HLT_TrigT2CaloJet
→ 163.605 kb	38.949 kb	0.156 kb	0.065	250	(B) TrigRoiDescriptorCollection_tlp1_HLT_initialRoI
217.361 kb	60.725 kb	0.243 kb	0.050	250	(B) TrigRoiDescriptorCollection_tlp1_HLT
240.863 kb	70.211 kb	0.281 kb	0.046	250	(B) TrigRoiDescriptorCollection_tlp1_HLT_T2TauFinal

Correct way to get the initial RoIDescriptor (build from LVL1 ROI):

```
vector< Feature<TrigRoiDescriptor> > roi = fc.get<TrigRoiDescriptor>("initialRoI");
```

Note: the persistent data the type is *TrigRoiDescriptorCollection*, while through the navigation you get *TrigRoiDescriptor* objects. Again, the best way to find out is, at the moment, to look at [TrigEventARA/selection.xml](https://twiki.cern.ch/twiki/bin/view/AtlasSoftware/TrigEventARA/selection.xml).

Expert Access with the TDT

- Some methods are not needed for most physics analyses, but for detailed trigger investigation (rate tool, timing tools, trigger validation)
- Access via

```
Trig::ExpertMethods* em = tdt->ExperimentalAndExpertMethods();  
em->enable();
```

ExpertMethods:

const TrigConf::TriggerItem * [getItemConfigurationDetails](#)(const std::string &chain)

return TrigConf::TriggerItem chain: name of the item

const TrigConf::HLTChain * [getChainConfigurationDetails](#)(const std::string &chain)

return TrigConf::HLTChain chain: name of the chain

const [LVL1CTP::Lvl1Item](#) * [getItemDetails](#)(const std::string &chain) const

return [LVL1CTP::Lvl1Item](#) chain: name of the item

const [HLT::Chain](#) * [getChainDetails](#)(const std::string &chain) const

return [HLT::Chain](#) chain: name of the chain

const [HLT::NavigationCore](#) * [getNavigation](#)() const

return [HLT::NavigationCore](#)

}
Access to
trigger
configuration

}
Access to
complete
trigger
decision

}
Access to
Navigation

Trigger Object Matching

- Why?
 - Some analyses require **object level** trigger information: Tag and Probe
 - Some analyses have **multiple objects** of same type and need matching for detailed efficiency estimation
 - Trigger selection design and optimisation
- Matching framework available in Trigger/TrigAnalysis/TrigObjectMatching package in release **15.3.0** and later
- Examples available in Trigger/TrigAnalysis/TrigAnalysisExamples in release **15.4.0** and later
 - **TrigMatchExAlg** - **Athena** example of matching for each common offline type
 - **TrigMatchExampleARA** - Example of trigger matching in **ARA**
 - **TagAndProbeExAlg** - Athena example of **tag and probe** analysis with trigger matching
- **TWiki** available with detailed information for users and developers
 - <https://twiki.cern.ch/twiki/bin/view/Atlas/TriggerObjectsMatching>


Matching Framework Overview

- Two basic questions
 - What **chains** is the offline object associated with?
 - **chainPassedByObject** - does reco object match a passed trigger object in a given chain?
 - **chainsPassedByObject** - list of chains that reco object passes
 - What are the **properties** of the trigger object the offline object is associated with?
 - **matchToTriggerObjects** - vector of trigger objects matching to reco object in given chain
 - **matchToTriggerObject** - return best matching trigger object in given chain


Matching Framework Implementation

- Three basic problems:


- Object distance

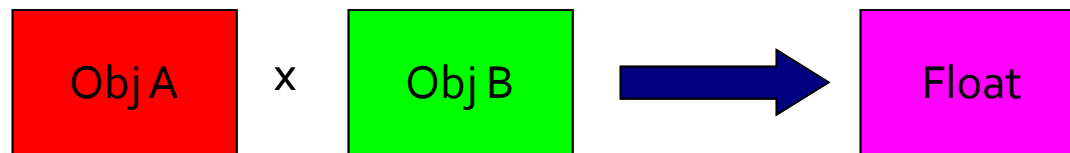

- Generic object matching

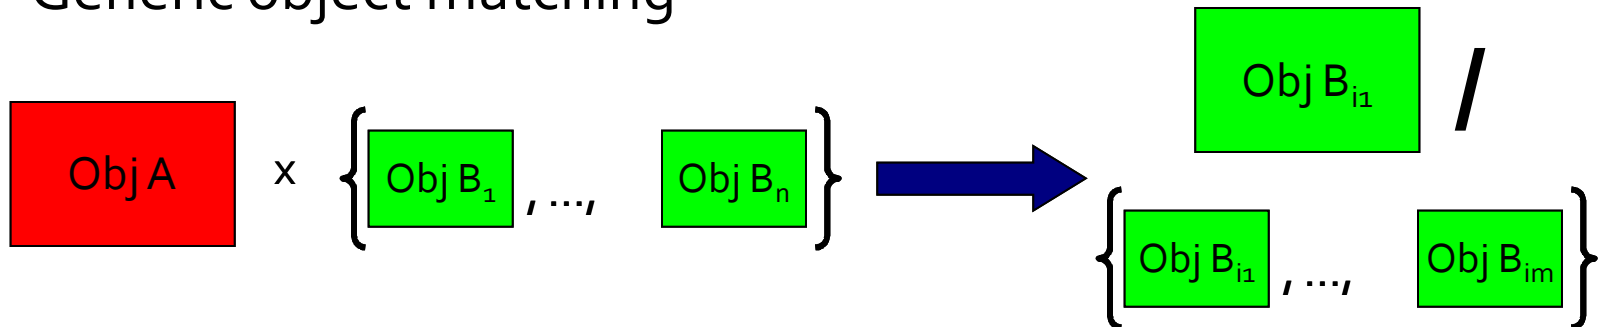

- Trigger specific matching

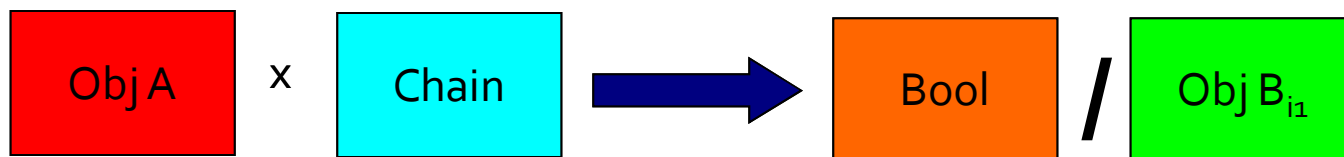

- Distance definition is implemented as a **function object** and passed as an **argument**
 - By default, ΔR is used
 - Arbitrarily complex matching possible
- Quality of matches
 - Smallest ΔR is **not a guarantee** of a good match
- Container type objects
 - EF trigger objects attached as **containers**, so matches are to a container rather than an individual trigger object
- What it means to pass a chain
 - Chain passed if match to trigger object associated with active trigger element
 - For multi-object triggers or intermediate trigger objects, an offline object can **pass a failed chain**
- Relative trigger level efficiencies
 - Possible to pass EF without passing L2 (passthrough, direction resolution effects)

- <http://trigconf.cern.ch>:
 - Main web portal to trigger configuration by run number, MC menu name, configuration keys
 - Uses TriggerTool and AtlCoolTrigger.py underneath
- TriggerTool:
 - Java based GUI to browse the TriggerDB (replica) for all information
 - Also used at point 1 for preparation of trigger
- AtlCoolTrigger.py:
 - Command line tool to show release, configuration keys, menu information, streams for data
- <http://atlas-runquery.cern.ch/>
 - Query page for trigger chains, prescales, trigger release for data

- Go to <http://trigconf.cern.ch>

1. Enter run-range

Comparing trigger configurations

run OR smk L1 psk and HLT psk [Compare Configurations](#)

Specify either run number or set of configuration keys for comparison with the trigger configuration above

2. Click on link in resulting run list

Also with simple comparison functionality

Click on L1 prescale to get to full trigger menu display. Mark two menus and click **diff**

run	Start Time	SMK	HLT PSK	HLT PSKs
91001	Wed Oct 8 15:28:35 2008	351	368	\$20 (1-) ☐
91003	Wed Oct 8 15:36:43 2008	351	368	\$20 (1-) ☐
91007	Wed Oct 8 15:54:39 2008	351	368	\$20 (1-) ☒
91043	Wed Oct 8 21:03:23 2008	355	373	\$20 (1-) ☒
91044	Wed Oct 8 21:27:12 2008	351	369	\$20 (1-) ☐
91045	Wed Oct 8 21:37:16 2008	351	369	\$20 (1-) ☐
91047	Wed Oct 8 22:04:03 2008	351	369	\$20 (1-) ☐
91056	Wed Oct 8 22:42:37 2008	351	369	\$20 (1-) ☐
91059	Wed Oct 8 23:57:22 2008	351	368	\$20 (1) ☐ \$20 (2) ☐ \$21 (1) ☐
91060	Thu Oct 9 01:28:35 2008	351	368	\$20 (1) ☐ \$22 (2-5) ☐ \$20 (1) ☐
91077	Thu Oct 9 12:25:35 2008	351	368	\$15 (1-) ☐
91086	Thu Oct 9 13:12:05 2008	351	368	\$15 (1-2) ☐ 9 (3-) ☐
91112	Thu Oct 9 14:13:32 2008	357	356	\$19 (1-) ☐

Streams

[L1Calo](#) | [RNDM](#) | [TGCwBeam](#) | [MBTS_BCM_LUCID](#) | [RPCwBeam](#) | [CosmicMuons](#) | [IDCosmic](#) | [IDTracks](#) | [express](#) | [BPTX](#) | [L1CaloEM](#) | [CosmicDownwardMuons](#) | [Tile](#) | [LArCells](#)

L1Calo									
EF chain	PS	PT	STP	L2 chain	PS	PT	L1 item	L1 prescale	
#10_loose	1	0	1	#10_loose	1	0	EM7	1	
#10_loose_pass12	1	0	1	#10_loose_pass12	1	0	EM7	1	
#10_loose_passEF	1	0	1	#10_loose_passEF	1	0	EM7	1	
#10_medium	1	0	1	#10_medium	1	0	EM7	1	
#10	1	0	1	#10	1	0	EM7	1	
tau12_loose	1	0	1	tau12_loose	1	0	TAU6	1	
tau161_loose	1	0	1	tau161_loose	1	0	TAU9I	1	
tauNoCut	1	0	1	tauNoCut	1	0	TAU5	1	
J5	1	0	1	J5	1	0	J5	1	
J10	1	0	1	J10	1	0	J10	1	
J20	1	0	1	J20	1	0	J20	1	
J10	1	0	1	J10	1	0	J10	1	
FJ18	1	0	1	FJ18	1	0	FJ18	1	
2FJ18	1	0	1	2FJ18	1	0	2FJ18	1	
te150	1	0	1	te150	1	0	TE150	-1	
se20	1	0	1	se20	1	0	XE20	1	
tau161_EFse30	1	0	1	tau161_loose	1	0	TAU9I	1	
J50	1	0	1	J23	1	0	J10	1	
se_debug_EFonly	1	0	1						
trk9i	1	0	1	trk9i	1	0	TAU6	1	
trk16i	1	0	1	trk16i	1	0	TAU9I	1	
trk9i_id	1	0	1	trk9i_id	1	0	TAU6	1	
tauNoCut_TauRecNoTopo	1	0	1	tauNoCut_TauRecNoTopo	1	0	TAU5	1	
tauNoCut_calo	1	0	1	tauNoCut_calo	1	0	TAU5	1	
a5_NoCut	1	0	1	a5_NoCut	1	0	EM3	1	
a5_NoCut_idScan	1	0	1	a5_NoCut_idScan	1	0	EM3	1	
a5_NoCut_TRT	1	0	1	a5_NoCut_TRT	1	0	EM3	1	
a5_NoCut_SiTrk	1	0	1	a5_NoCut_SiTrk	1	0	EM3	1	
a5_NoCut_FwdBackTrk	1	0	1	a5_NoCut_FwdBackTrk	1	0	EM3	1	
se20_noMu	1	0	1	se20_noMu	1	0	XE20	1	
#10_calib	1	0	1	#10_calib	1	0	EM7	1	
se20_noiseSupp	1	0	1	se20_noiseSupp	1	0	XE20	1	
se20_FEB	1	0	1	se20_FEB	1	0	XE20	1	
a5_nocut	1	0	1	a5_nocut	1	0	EM3	1	
se150_noMu	1	0	1	se150_noMu	1	0	TE150	-1	
SingleBeamL1Calo	1	0	1	SingleBeamL1Calo	1	0			


RNDM									
EF chain	PS	PT	STP	L2 chain	PS	PT	L1 item	L1 prescale	
Mb6pTrk	1	0	1	Mb6pTrk	1	0	R10_FILLED	-1	
Mb6rndm	1	0	1	Mb6rndm	1	0	R10_FILLED	-1	
Mb6se	1	0	1	Mb6se	1	0	R10_FILLED	-1	
SingleBeamRNDM	1	0	1	SingleBeamRNDM	1	0			

TGCwBeam									
EF chain	PS	PT	STP	L2 chain	PS	PT	L1 item	L1 prescale	
MbTGC_SpFwd_nixsst	1	0	1	MbTGC_SpFwd_nixsst	1	0	MUO_TGC_HALO	-1	
MbTGC_Mbks_1	1	0	1	MbTGC_Mbks_1	1	0	MUO_TGC_HALO	-1	
MbTGC_Mbks_2	1	0	1	MbTGC_Mbks_2	1	0	MUO_TGC_HALO	-1	
MbTGC_SpFwd_sct	1	0	1	MbTGC_SpFwd_sct	1	0	MUO_TGC_HALO	-1	

- [Up](#)
- [Top](#)
- [Streams](#)
- [L1 Items](#)
- [L1 Thresholds](#)
- [L2 chains](#)
- [EF chains](#)
- [Groups](#)
- [Sequences](#)
- [Help/Feedback](#)

- Trigger Menu and L1 rates stored in COOL, HLT rates coming. Quick access via
 - AtlCoolTrigger.py (command line tool)
 - AtlCoolTrigger.py -r 91000-99000 (many run summary)
 - AtlCoolTrigger -v -m -r 90272 (single run menu)
 - Prints keys, trigger menus, streams, allows diff-ing of menus in different runs, creates menu in xml format
 - Run summary pages (WEB based): <http://atlas-service-db-runlist.web.cern.ch/atlas-service-db-runlist/query.html>
 - Trigger names, rates for single run

- <http://www.cern.ch/triggertool>

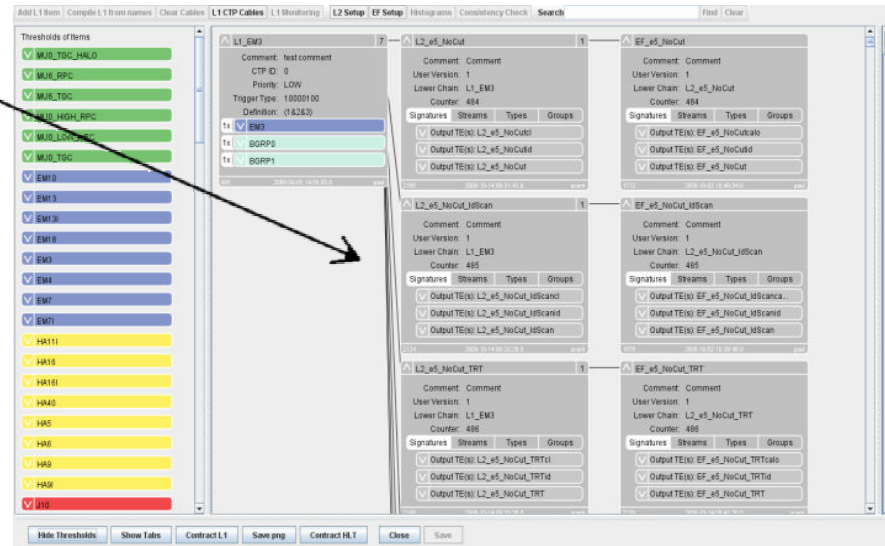

Scripts to Check Pool File Content

- `checkTrigger.py AOD.pool.root`
 - Runs over ESD/AOD/DPD and presents detailed (chain-wise) counts of the trigger decision

- `checkTriggerConfig.py -d AOD.pool.root`
 - Runs on ESD/AOD/DPD and presents detailed trigger configuration(s)
 - Shows multiple configurations (merged DPD)

```
File:AOD.pool.root
Size: 55955.492 kb
NbrEvents: 250

Trigger configuration summary:
SMK: 0, HLTpsk: 0, L1psk: 0
Config source: TriggerMenuXML/LVL1config_MC_lumiE31_no_prescale_15.1.0.xml and
TriggerMenuXML/HLTconfig_MC_lumiE31_no_prescale_15.1.0.xml
L1 Items : 146
HLT Chains: 556
```

```
=====
ID level  Trigger name  Passed events: raw, after PS, after PT/Veto
=====
```

```
LVL1 Global LVL1      250
LVL2 Global LVL2      250
EF Global EF (LVL3)   250
```

```
-----
13 LVL1 L1_2EM13      71  71  71
14 LVL1 L1_2EM13l     34  34  34
163 LVL1 L1_2EM13_MU6  8   8   8
....
```

```
-----
...
77 LVL2 L2_2g10       118 118 118
246 LVL2 L2_2g10_mu6  12  12  12
....
```

```
-----
...
477 EF EF_2e6_medium      8   8   8
478 EF EF_2e6_medium1     7   7   7
79  EF EF_2g20            39  39  39
248 EF EF_2j42_xe30        3   3   3
....
```

```
> checkTriggerConfig.py -d data09_cos.00121733.physics_L1Calo.recon.ESD.r733_tido73522/ESD.073522._000001.pool.root.1
...
EF: EF_muon_tgc_halo_IDSCAN (1.00), L2: L2_muon_tgc_halo_IDSCAN (1.00), L1: L1_MUon_TGC_HALO (1) [streams: TGCwBeam]
...
```

Trigger Content of Atlas-Runquery

ATLAS Run Queries

[Run Summaries](#) [Trigger Configuration Query](#) [AMI Data Search](#) [DDM Dashboard](#) [Tier-0 Monitoring](#) [DQ Monitoring](#) [Data Preparation](#) [Operations](#)

Run Search - Insert Your Query:

Show Runs

[default query condition]

Examples (query format inspired by SPIRES):

Run and event rangesTime ranges and durationDetectorsStreamsMagnetsData qualityProject tagTriggerPartition

Search Results

f r 90270-90300 and ev 100k+ / sh r and alleev and smk and rel and tr EF_e5*

f r 91890-92070 and smk 368,373 / sh smk and rel and tr EF_e5*

f r 91890-92070 / sh tr L2_E*,L2_Cosmic

f r 91890-92070 and tr EF_e5*

Selection rule:

Query command:

Selection sequence:

No. of runs selected:

f r 91890-92070 / sh r and alleev and smk and rel and tr EF_e5*

AtlRunQuery.py --run "91890-92070" --show run --show events --show allevents --show smk --show release --show "trigger" --show "trigger configuration" --verbose --projecttag "data08",data09*" --partition "ATLAS"

Checking for runs in run range [91890, 92070]: 25 runs found
Checking if the selected runs match the "data08",data09*" project tag: 3 runs found
Checking if the selected runs match the "ATLAS" partition: 95 runs found

70

Execution time: 19.6 sec

Hands-on session
earlier today

- Search for runs by release, configuration key, trigger content
- Display and have links to run-summary, AMI, trigconf.ch, e-log

Run	Links	#LB	#Events	#Events (SFO)	#L2A	SMK	HLT PSK	L1 PSK	Release	Trigger Chains
91890	RS , AMI , Trigger , ELOG	35	2,022,080	2,297,668	5,787,181	368	388	n.a.	14.2.23.2	EF_e5_NoCut (1I0), EF_e5_NoCut_IdScan (1I0), EF_e5_NoCut_TRT (1I0), EF_e5_NoCut_SiTrk (1I0), EF_e5_NoCut_FwdBackTrk (1I0)
91891	RS , AMI , Trigger , ELOG	24	n.a.	n.a.	n.a.	368	388	n.a.	14.2.23.2	EF_e5_NoCut (1I0), EF_e5_NoCut_IdScan (1I0), EF_e5_NoCut_TRT (1I0), EF_e5_NoCut_SiTrk (1I0), EF_e5_NoCut_FwdBackTrk (1I0)
91892	RS , AMI , Trigger , ELOG	1	2,344,840	2,620,933	6,743,545	n.a.	n.a.	n.a.	n.a.	
91893	RS , AMI , Trigger , ELOG	1	23,316	26,452	75,012	368	388	n.a.	14.2.23.2	EF_e5_NoCut (1I0), EF_e5_NoCut_IdScan (1I0), EF_e5_NoCut_TRT (1I0), EF_e5_NoCut_SiTrk (1I0), EF_e5_NoCut_FwdBackTrk (1I0)
91894	RS , AMI , Trigger , ELOG	1	0	0	0	368	388	n.a.	14.2.23.2	EF_e5_NoCut (1I0), EF_e5_NoCut_IdScan (1I0), EF_e5_NoCut_TRT (1I0), EF_e5_NoCut_SiTrk (1I0), EF_e5_NoCut_FwdBackTrk (1I0)
91895	RS , AMI , Trigger , ELOG	3	20	22	20	368	388	n.a.	14.2.23.2	EF_e5_NoCut (1I0), EF_e5_NoCut_IdScan (1I0), EF_e5_NoCut_TRT (1I0), EF_e5_NoCut_SiTrk (1I0), EF_e5_NoCut_FwdBackTrk (1I0)
91896	RS , AMI , Trigger , ELOG	2	40	46	40	368	388	n.a.	14.2.23.2	EF_e5_NoCut (1I0), EF_e5_NoCut_IdScan (1I0), EF_e5_NoCut_TRT (1I0), EF_e5_NoCut_SiTrk (1I0), EF_e5_NoCut_FwdBackTrk (1I0)

- Trigger data access in Athena, ARA, C++, or python with the TrigDecisionTool!
 - Many examples, plus a large number of people to provide help when needed (hn-atlas-TriggerHelp at cern.ch)
- Tools to check the trigger information for given run
 - Configuration: TriggerTool or <http://trigconf.cern.ch>
 - Pool files: checkTrigger.py and checkTriggerConfig.py
- Prescales to be checked for each lumiblock → luminosity
 - Remember that negative prescale means trigger did not run
- Important for analysis: matching of offline reconstruction and trigger objects

Additional Information

Trigger user info: Tutorials:	https://twiki.cern.ch/twiki/bin/view/Atlas/TriggerUserPages https://twiki.cern.ch/twiki/bin/view/Atlas/TriggerSoftwareTutorialPage
TDT Twiki:	https://twiki.cern.ch/twiki/bin/view/Atlas/TrigDecisionTool
TDT Doxygen:	http://atlas-computing.web.cern.ch/atlas-computing/links/nightlyDevDirectory/AtlasOffline/latest_doxygen/InstallArea/doc/TrigDecisionTool/html/index.html
Trigger obj matching:	https://twiki.cern.ch/twiki/bin/view/Atlas/TriggerObjectsMatching
TrigAnalysisExample:	http://atlas-computing.web.cern.ch/atlas-computing/links/nightlyDevDirectory/AtlasOffline/latest_doxygen/InstallArea/doc/TrigAnalysisExamples/html/index.html
UserAnalysis example:	https://twiki.cern.ch/twiki/bin/view/AtlasProtected/UserAnalysis
Trigger Configuration:	http://trigconf.cern.ch
TriggerTool:	http://www.cern.ch/triggertool
Run query:	http://atlas-runquery.cern.ch/
Trigger EDM:	https://twiki.cern.ch/twiki/bin/view/Atlas/TriggerEDM , http://alxr.usatlas.bnl.gov/lxr/source/atlas/Trigger/TrigEvent/TrigEventARA/TrigEventARA/selection.xml
TriggerMenu group:	https://twiki.cern.ch/twiki/bin/view/Atlas/TriggerPhysicsMenu
TriggerSW group:	https://twiki.cern.ch/twiki/bin/view/Atlas/TAPMCoreSW
TriggerConfig group:	https://twiki.cern.ch/twiki/bin/view/Atlas/TriggerConfiguration
Help on e-groups:	hn-atlas-TriggerHelp at cern.ch